


材料 Ma a TN130G

特点 F a

高磁导率 H I a P ab

Complex permeability vs.Frequency

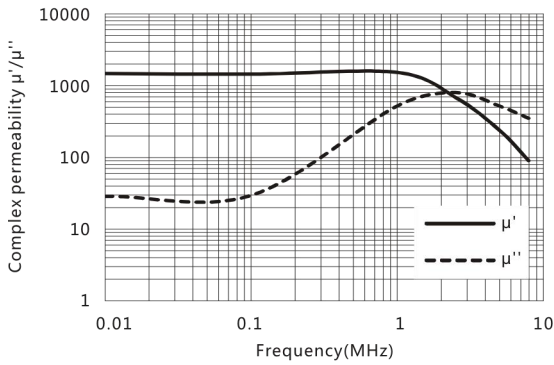

Initial permeability	μ_i	25°C	1300±20%
Saturation magnetic flux density	Bs(mT)	25°C	240
Relative loss factor 10kHz	$\tan\delta/\mu_i$ ($\times 10^{-6}$)	25°C	≤15
Relative temperature coefficient	$\alpha_{\mu ir}$ ($\times 10^{-6}/^{\circ}\text{C}$)	20 ~ 60°C	8
Curie temperature	Tc(°C)		>85
Electrical resistivity	$\rho(\Omega\cdot\text{m})$		10^6
Density	d(kg/m ³)		4.8×10^3



Test core : Toroid(mm)

OD : 12.7

ID : 7.9

H : 6.5

Relative loss factor vs.Frequency

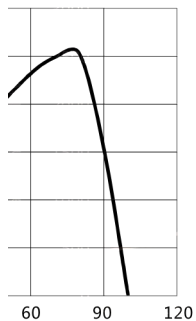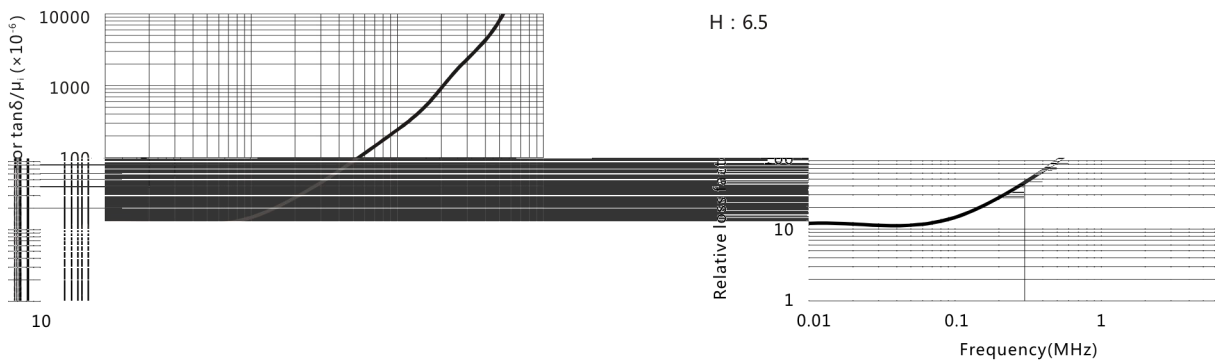

C)

