


材料 Ma a TP4B

特点 F a





低磁心损耗，高饱和磁感应强度 L C L a H Sa a F D

主要应用较低温度 °C~ °C 和中频段 H 到 H M U L T a

°C~ °C a M F c H H

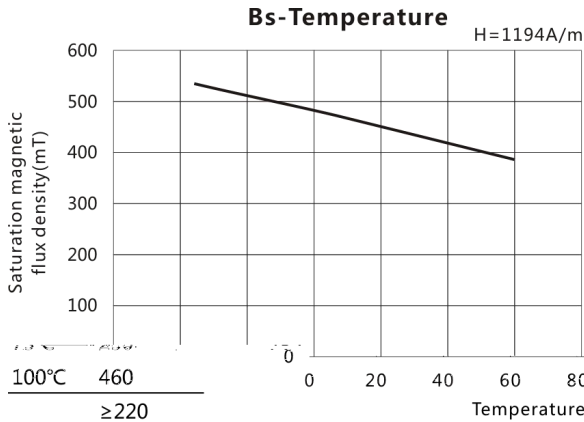


Initial permeability	μ_i	25°C	2500±25%
Saturation magnetic flux density	Bs(mT)	25°C	530
		100°C	420
Remanence	Br(mT)	25°C	120
		100°C	80
Coercivity	Hc(A/m)	25°C	12
		100°C	8
Core loss	Pcv(kW/m ³)	25°C	570
		75°C	250
		100kHz±200mT	

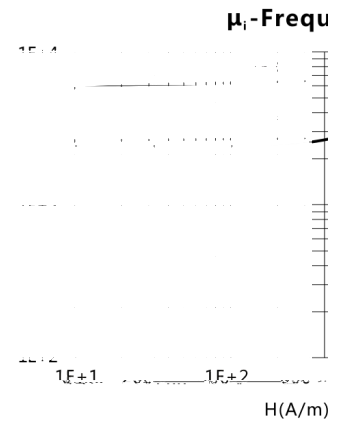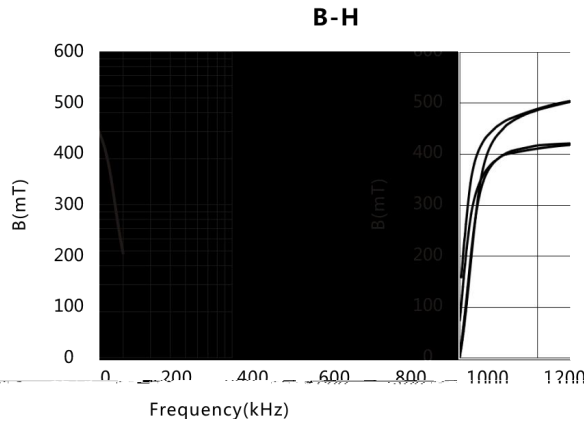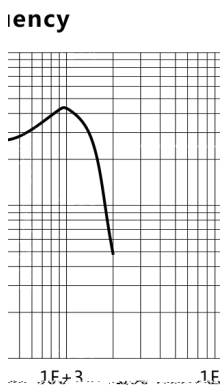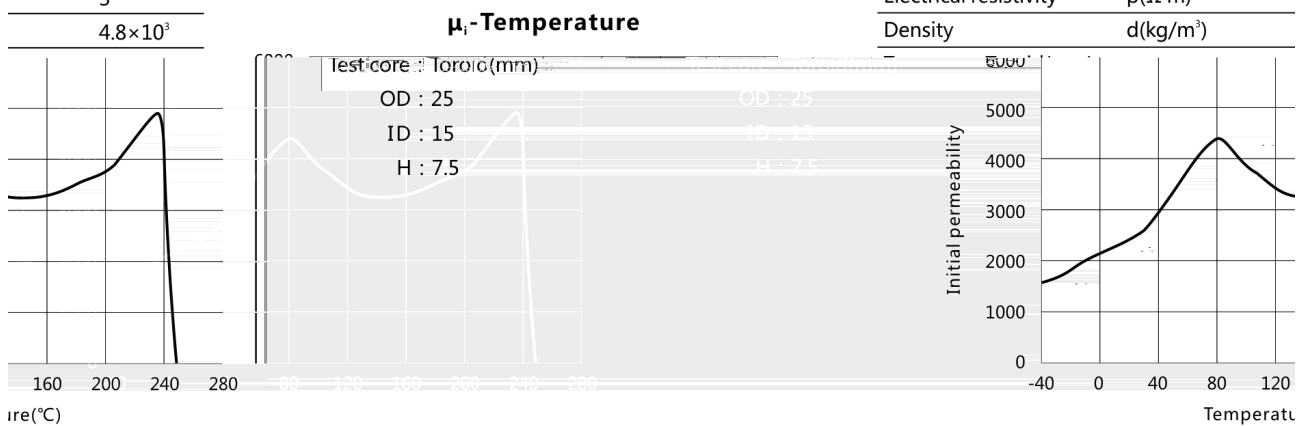


材料 Ma a TP4B


Pcv-Temperature

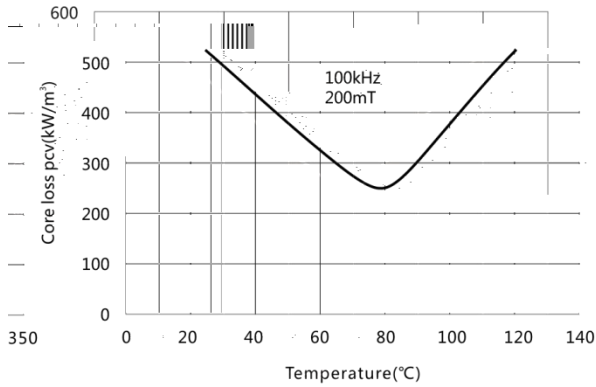

μ_a -Bm

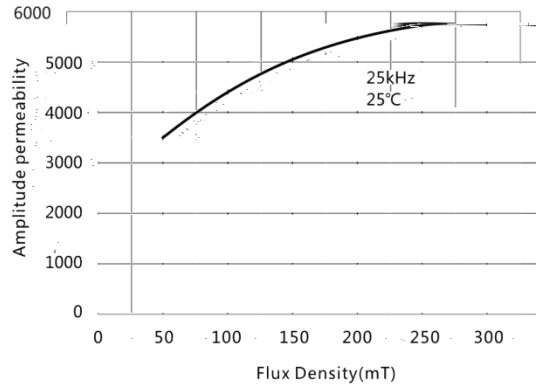

Pcv-Bm

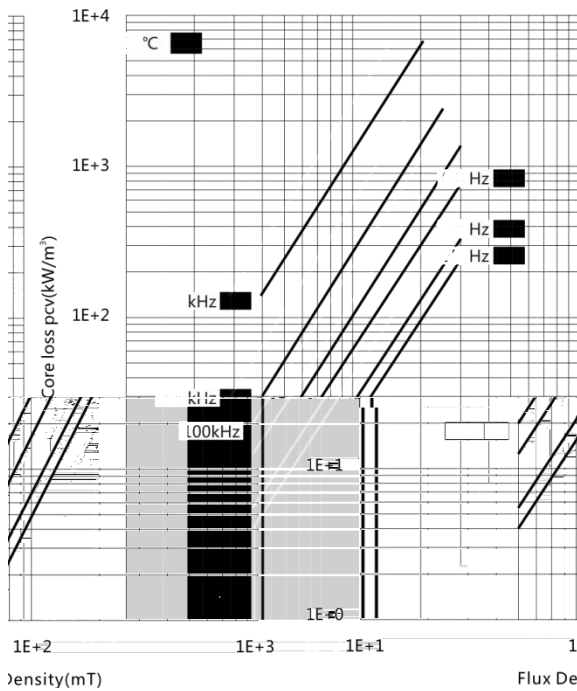

Pcv-Bm

